

MIDI Foot Controller (FC-3) Firmware Upgrade Manual

About

Through this document, users can upgrade the new MIDI Foot Controller (FC-3) box by themselves. When DOREMiDi has new firmware, it will be announced on the official website. Follow the latest official news:

<https://www.doremidi.cn/h-pd-61.html?fromMid=360&fromCollId=104>

Upgrade system requirements: Windows 7 or newer version of Windows system or Mac OS.

Windows: [DOREMiDi Upgrade tool for Windows.zip](#)

MacOS: [DOREMiDi Upgrade tool for MacOS.dmg](#)

(Note: If the link cannot be downloaded, please go to the official website to download the software. www.doremidi.cn)


Step 1: Enter the upgrade mode

Press and hold the 1 and 2 pedals, then connect to the computer via USB DEVICE, then release the 1 and 2 pedals, the USB DEVICE indicator light flashes, indicating that the upgrade mode is entered.



Step 2: Upgrade the firmware

- Open "DOREMiDi Upgrade Tool", select USB, select the COM port of FC-3, and click "Connect".
- Click "Open File", select the upgraded firmware FC-3_Vxxx.bin, click "Upgrade", wait for the upgrade to complete "Upgrade completed!".

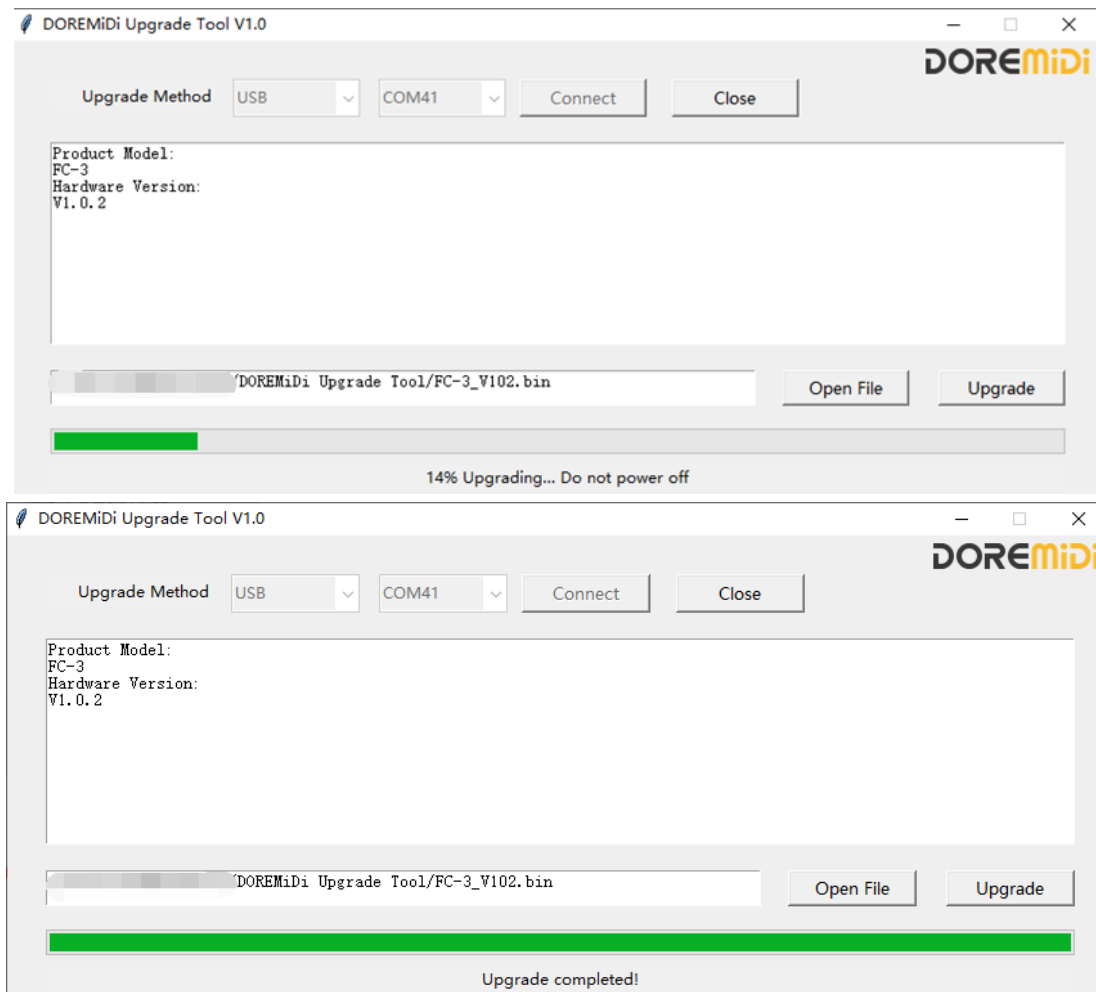

Finally power off and restart the product!

Q&A

Q: How to determine the COM interface?

A: After selecting the COM interface, try to click "Connect". If it is not a DOREMiDi device, "Timeout" will be displayed.

Q: After the FC-3 enters the upgrade mode, the computer USB cannot recognize the device.

A: This may be because the computer lacks a driver, please try to install the "Virtual COM Port Driver". Link: <https://www.doremidi.cn/h-pd-61.html?fromMid=360&fromColId=104>

If the Win7 driver cannot be installed, please follow this link to troubleshoot the problem: <https://www.doremidi.club/articles/4>