

## MIDI HUB-8 Box(HUB-8) upgrade instructions

### About

Through this document, users can upgrade the new version HUB-8 box by themselves. When DOREMiDi has new firmware, it will be announced on the official website. Follow the official latest news: <https://www.doremidi.cn/h-pd-46.html>

**Upgrade system requirements:** Windows 7 or newer version of Windows system or Mac OS.

Windows: [DOREMiDi Upgrade tool for Windows.zip](#)

MacOS: [DOREMiDi Upgrade tool for MacOS.dmg](#)


(Note: If the link cannot be downloaded, please go to the official website to download the software. [www.doremidi.cn](http://www.doremidi.cn))

### Step 1: Enter the upgrade mode


- Press and hold the hidden button with the sharp object.
- Then, supply power to HUB-8 through DC IN, and then release the button, then 2 indicators will be blinking.
- Connect the "USB3.1 To HOST" to the computer.





**Step 2:** Open "DOREMiDi Upgrade Tool", select "USB", select the 1st COM port (Not COM1), click "Connect".

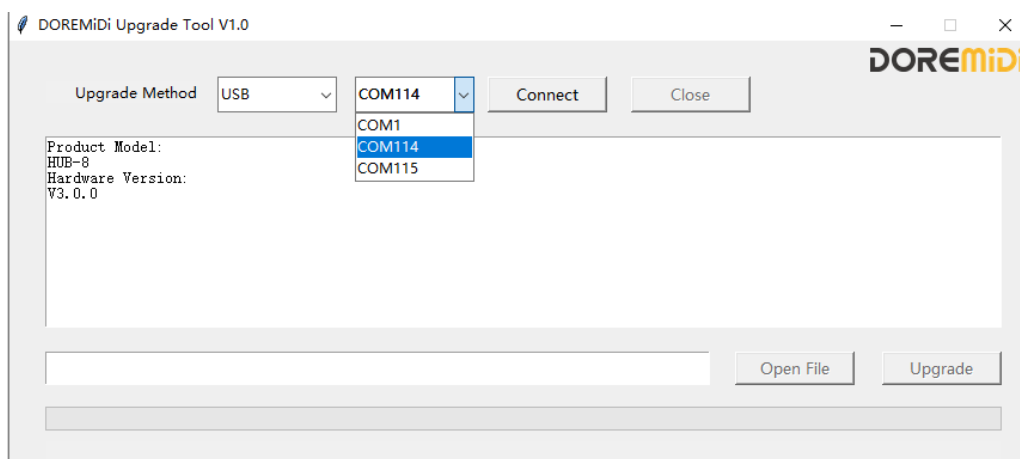

**Step 3:** Click "Open File", select the upgraded firmware HUB-8\_Vxxx, click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!".

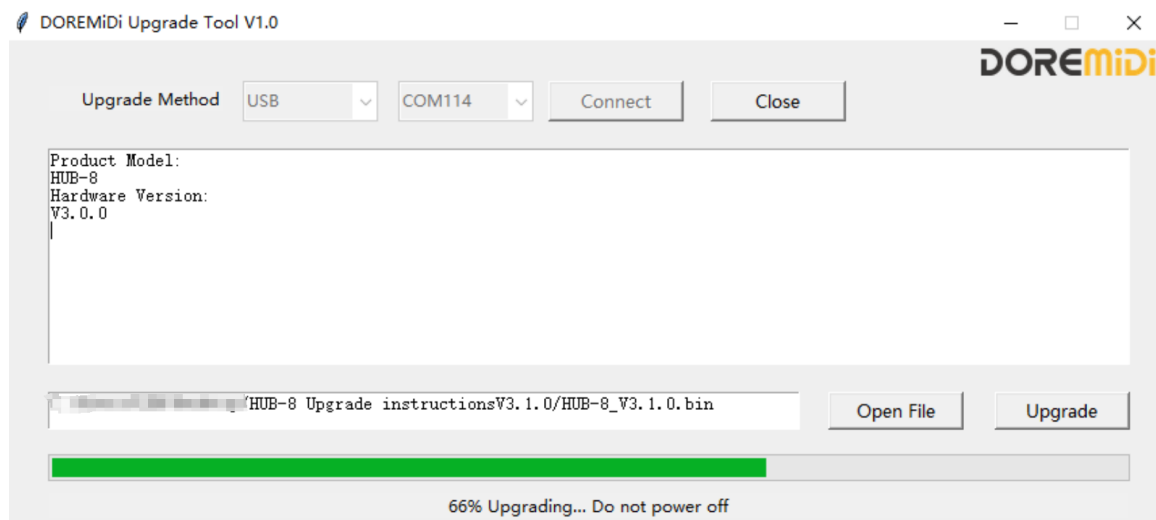

**Step 5:** Click "Close" → select the second COM port (not COM1) → click "Connect" select the upgraded firmware HUB-8\_Vxxx→click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!"

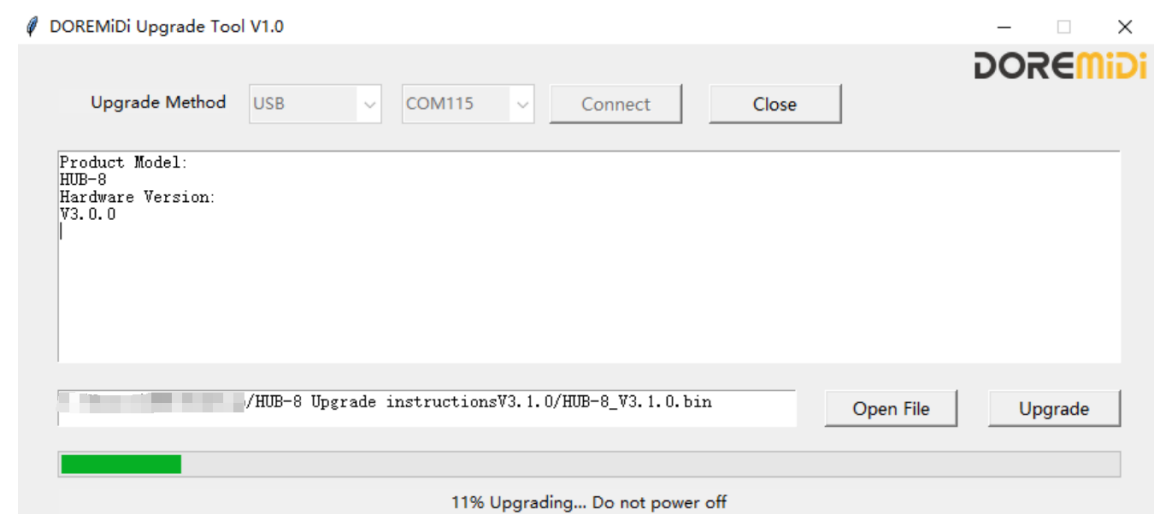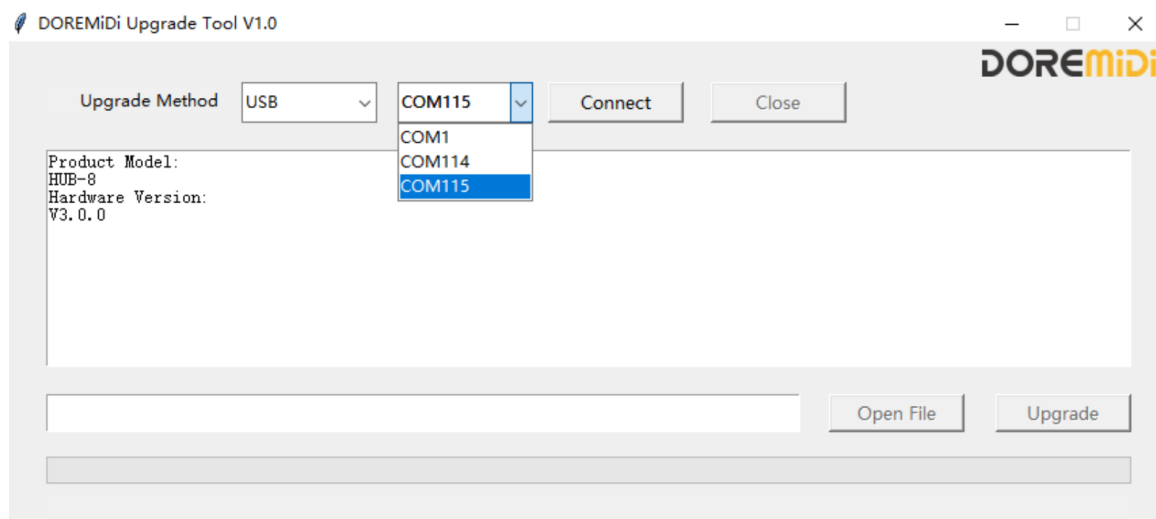

**Q: How to determine the COM interface?**

A: After selecting the COM interface, please try to click "Connect". If it is not a DOREMiDi device, "time out" will be displayed.

**Q: After HUB-8 enters the upgrade mode, the computer USB cannot recognize the device.**

A: This may be because the computer lacks a driver, please try to install the " Virtual COM Port Driver ". Link: <https://www.doremidi.cn/h-pd-46.html>