

MIDI Sound Module (SM-10) Upgrade Instructions

About

Through this document, users can upgrade the new version of the SM-10 by themselves. When DOREMiDi has new firmware, it will be announced on the official website. Follow the official latest news: <https://www.doremidi.cn/h-pd-96.html>

Upgrade system requirements: Windows 7 or newer version of Windows system or Mac OS.

Windows: [DOREMiDi Upgrade tool for Windows.zip](#)

MacOS: [DOREMiDi Upgrade tool for MacOS.dmg](#)


(Note: If the link cannot be downloaded, please go to the official website to download the software. www.doremidi.cn)

Step 1: Enter the upgrade mode


- Connect the "USB DEVICE" to the computer, press and hold the knob to turn on the power, and the SM-10 will enter the firmware upgrade mode.



Step 2: Open "DOREMiDi Upgrade Tool", select USB, select the COM port to SM-10, and click "Connect".

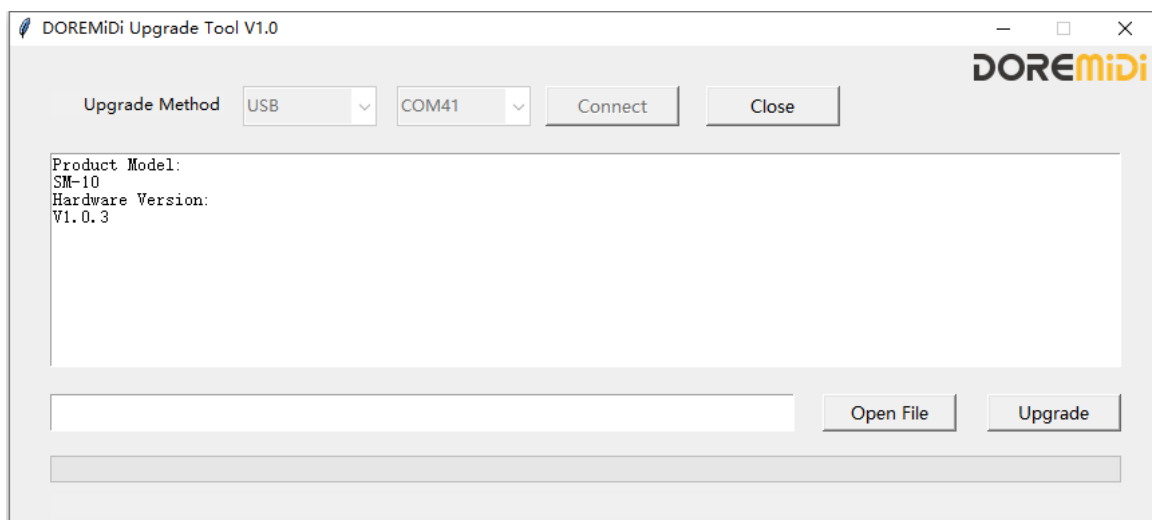

Step 3: Click "Open File", select the upgraded firmware SM-10_Vxxx, click "Upgrade", and wait for the upgrade to be completed "Upgrade completed!".

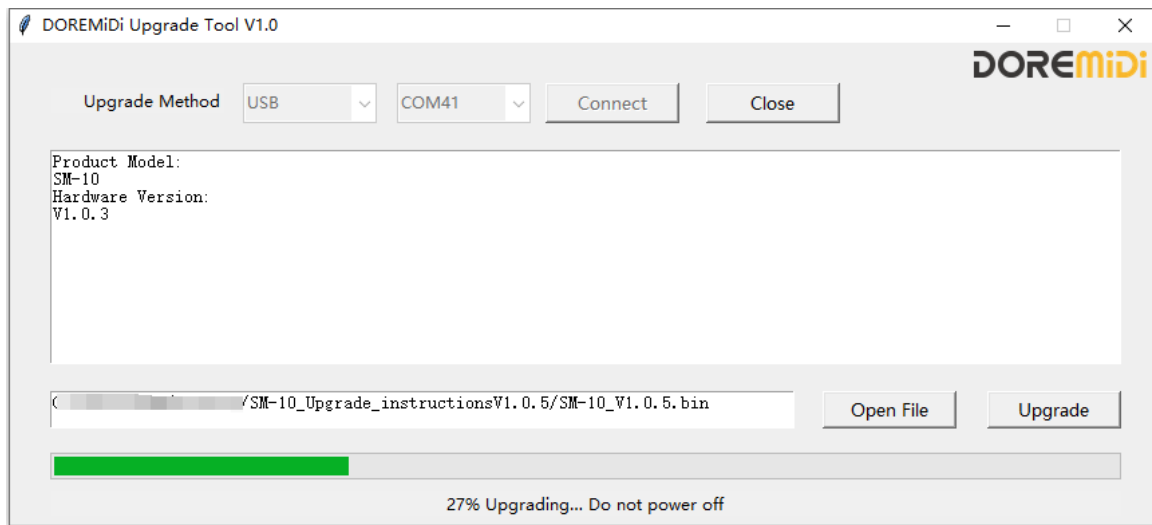

(Note: Do not unplug the power supply during the upgrade process, otherwise the upgrade will fail and the product will be damaged and cannot be restored.)

Important: Power off , restart and factory reset the product at last!

Q&A

Q: How to determine the COM interface?

A: After selecting the COM interface, please try to click "Connect". If it is not a DOREMiDi device, "time out" will be displayed.

Q: After device enters the upgrade mode, the computer USB cannot recognize the device.

A: This may be because the computer lacks a driver, please try to install the "Virtual COM Port Driver ". Link: [Virtual COM Port Driver V1.5.0.zip](#)